


INDEX

SECTION 9 - FIBERGLASS GUY STRAIN INSULATORS

CATALOG NUMBER SYSTEM- - - - -	-9-0
FIBERGLASS GUY STRAIN INSULATORS 15,000 POUND RATING CLEVIS THIMBLE EYE - - - - -	-9-1
FIBERGLASS GUY STRAIN INSULATORS 21,000 POUND RATING CLEVIS THIMBLE EYE - - - - -	-9-2
FIBERGLASS GUY STRAIN INSULATORS 30,000 POUND RATING CLEVIS THIMBLE EYE - - - - -	-9-3
FIBERGLASS GUY STRAIN INSULATORS 15,000 POUND RATING CLEVIS THIMBLE - - - - -	-9-4
FIBERGLASS GUY STRAIN INSULATORS 21,000 POUND RATING CLEVIS THIMBLE - - - - -	-9-5
FIBERGLASS GUY STRAIN INSULATORS 30,000 POUND RATING CLEVIS THIMBLE - - - - -	-9-6
FIBERGLASS GUY STRAIN INSULATORS 15,000 POUND RATING CLEVIS CLEVIS ROLLER- - - - -	-9-7
FIBERGLASS GUY STRAIN INSULATORS 21,000 POUND RATING CLEVIS CLEVIS ROLLER - - - - -	-9-8
FIBERGLASS GUY STRAIN INSULATORS 30,000 POUND RATING CLEVIS CLEVIS ROLLER - - - - -	-9-9
FIBERGLASS GUY STRAIN INSULATORS 15,000 POUND RATING THIMBLE EYE THIMBLE EYE- - - - -	-9-10
FIBERGLASS GUY STRAIN INSULATORS 21,000 POUND RATING THIMBLE EYE THIMBLE EYE- - - - -	-9-11
FIBERGLASS GUY STRAIN INSULATORS 30,000 POUND RATING THIMBLE EYE THIMBLE EYE- - - - -	-9-12
FIBERGLASS GUY STRAIN INSULATORS 15,000 POUND RATING THIMBLE THIMBLE- - - - -	-9-13
FIBERGLASS GUY STRAIN INSULATORS 21,000 POUND RATING THIMBLE THIMBLE- - - - -	-9-14
FIBERGLASS GUY STRAIN INSULATORS 30,000 POUND RATING THIMBLE THIMBLE- - - - -	-9-15

Catalog Number System

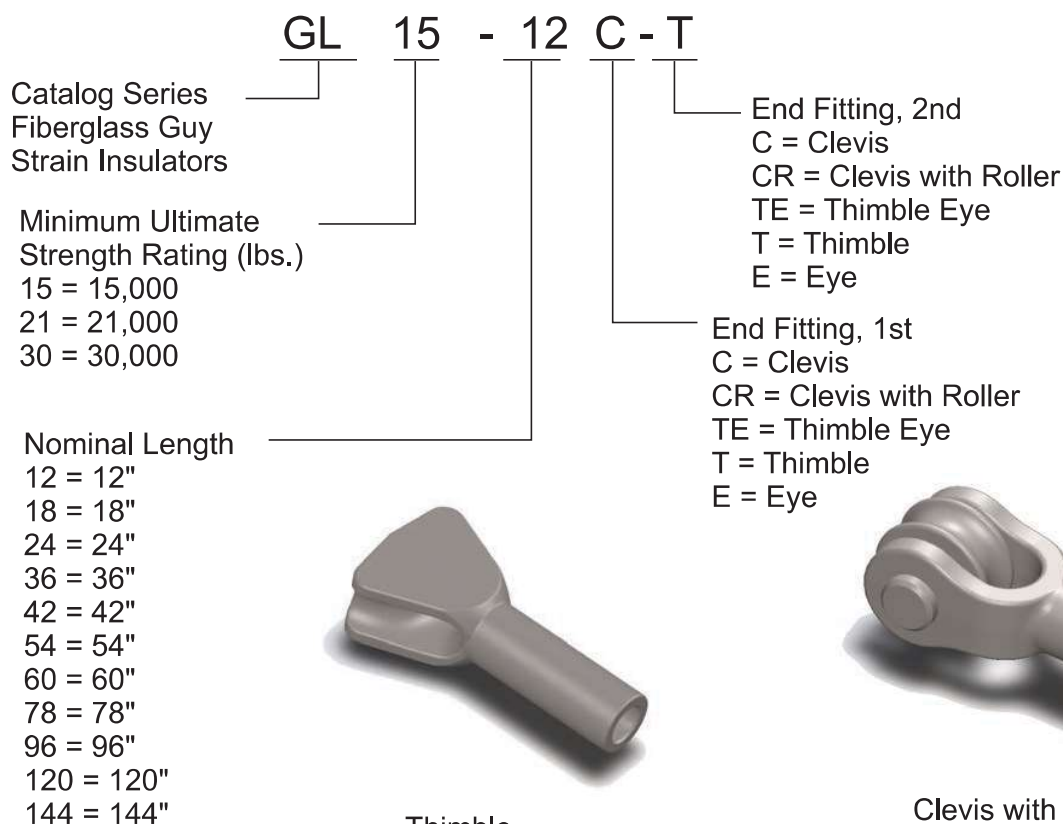

Thimble



Clevis with Roller



Eye



Clevis



Thimble Eye

FIBERGLASS GUY STRAIN INSULATORS

**15,000 Pound Rating:
Clevis & Thimble Eye**




SPECIFICATIONS:

FITTINGS: DUCTILE IRON HOT DIP GALVANIZED ASTM-A-153

FIBERGLASS ROD: PROPRIETARY VEILED GRAY POLYESTER WITH ADDED
ULTRAVIOLET PROTECTION

HARDWARE: STEEL HOT DIP GALVANIZED ASTM-A-153

COTTER PIN: STAINLESS STEEL

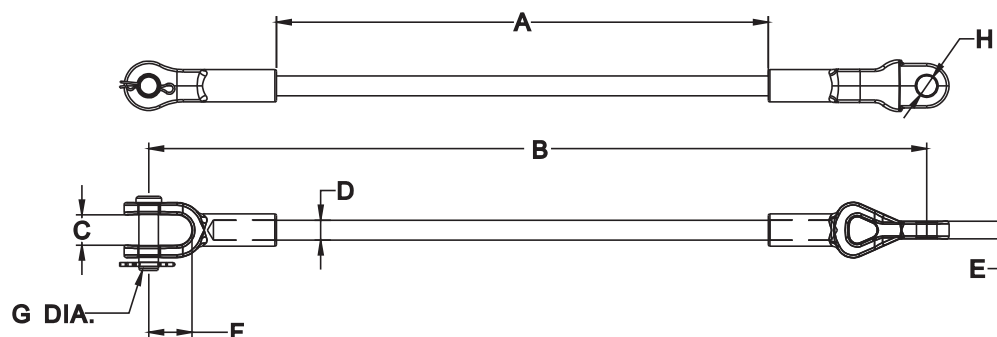

CATALOG NUMBER	DIMENSION(INCHES)								STRENGTH (Lbs.)	FITTINGS
	A	B	C	D	E	F	G	H		
GL15-12C-TE	12	21.1	0.965	0.625	0.562	1.378	0.625	0.65	15,000	Clevis-Thimble Eye
GL15-18C-TE	18	27.1	0.965	0.625	0.562	1.378	0.625	0.65	15,000	Clevis-Thimble Eye
GL15-24C-TE	24	33.1	0.965	0.625	0.562	1.378	0.625	0.65	15,000	Clevis-Thimble Eye
GL15-36C-TE	36	45.1	0.965	0.625	0.562	1.378	0.625	0.65	15,000	Clevis-Thimble Eye
GL15-42C-TE	42	51.1	0.965	0.625	0.562	1.378	0.625	0.65	15,000	Clevis-Thimble Eye
GL15-54C-TE	54	63.1	0.965	0.625	0.562	1.378	0.625	0.65	15,000	Clevis-Thimble Eye
GL15-60C-TE	60	69.1	0.965	0.625	0.562	1.378	0.625	0.65	15,000	Clevis-Thimble Eye
GL15-78C-TE	78	87.1	0.965	0.625	0.562	1.378	0.625	0.65	15,000	Clevis-Thimble Eye
GL15-96C-TE	96	105.1	0.965	0.625	0.562	1.378	0.625	0.65	15,000	Clevis-Thimble Eye
GL15-120C-TE	120	129.1	0.965	0.625	0.562	1.378	0.625	0.65	15,000	Clevis-Thimble Eye
GL15-144C-TE	144	153.1	0.965	0.625	0.562	1.378	0.625	0.65	15,000	Clevis-Thimble Eye

FIBERGLASS GUY STRAIN INSULATORS

**21,000 Pound Rating:
Clevis & Thimble Eye**




SPECIFICATIONS:

FITTINGS: DUCTILE IRON HOT DIP GALVANIZED ASTM-A-153

FIBERGLASS ROD: PROPRIETARY VEILED GRAY POLYESTER WITH ADDED ULTRAVIOLET PROTECTION

HARDWARE: STEEL HOT DIP GALVANIZED ASTM-A-153

COTTER PIN: STAINLESS STEEL

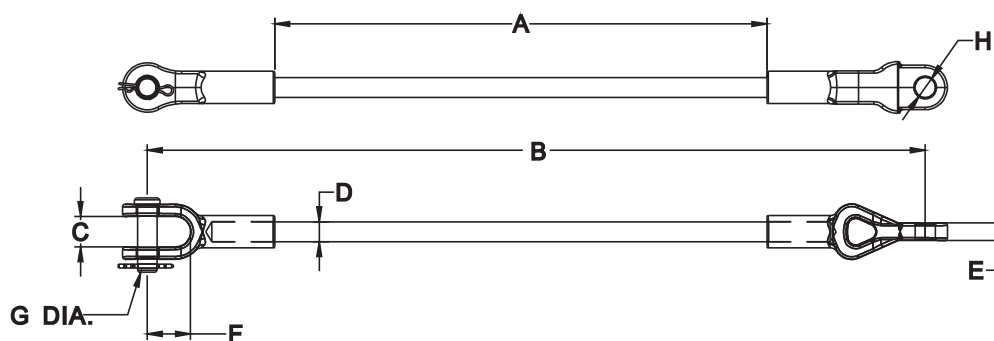

CATALOG NUMBER	DIMENSION(INCHES)								STRENGTH (Lbs.)	FITTINGS
	A	B	C	D	E	F	G	H		
GL21-12C-TE	12	22.2	1.024	0.75	0.63	1.693	0.75	0.811	21,000	Clevis-Thimble Eye
GL21-18C-TE	18	28.2	1.024	0.75	0.63	1.693	0.75	0.811	21,000	Clevis-Thimble Eye
GL21-24C-TE	24	34.2	1.024	0.75	0.63	1.693	0.75	0.811	21,000	Clevis-Thimble Eye
GL21-36C-TE	36	46.2	1.024	0.75	0.63	1.693	0.75	0.811	21,000	Clevis-Thimble Eye
GL21-42C-TE	42	52.2	1.024	0.75	0.63	1.693	0.75	0.811	21,000	Clevis-Thimble Eye
GL21-54C-TE	54	64.2	1.024	0.75	0.63	1.693	0.75	0.811	21,000	Clevis-Thimble Eye
GL21-60C-TE	60	70.2	1.024	0.75	0.63	1.693	0.75	0.811	21,000	Clevis-Thimble Eye
GL21-78C-TE	78	88.2	1.024	0.75	0.63	1.693	0.75	0.811	21,000	Clevis-Thimble Eye
GL21-96C-TE	96	106.2	1.024	0.75	0.63	1.693	0.75	0.811	21,000	Clevis-Thimble Eye
GL21-120C-TE	120	130.2	1.024	0.75	0.63	1.693	0.75	0.811	21,000	Clevis-Thimble Eye
GL21-144C-TE	144	154.2	1.024	0.75	0.63	1.693	0.75	0.811	21,000	Clevis-Thimble Eye

FIBERGLASS GUY STRAIN INSULATORS

**30,000 Pound Rating:
Clevis & Thimble Eye**




SPECIFICATIONS:

FITTINGS: DUCTILE IRON HOT DIP GALVANIZED ASTM-A-153

FIBERGLASS ROD: PROPRIETARY VEILED GRAY POLYESTER WITH ADDED
ULTRAVIOLET PROTECTION

HARDWARE: STEEL HOT DIP GALVANIZED ASTM-A-153


COTTER PIN: STAINLESS STEEL

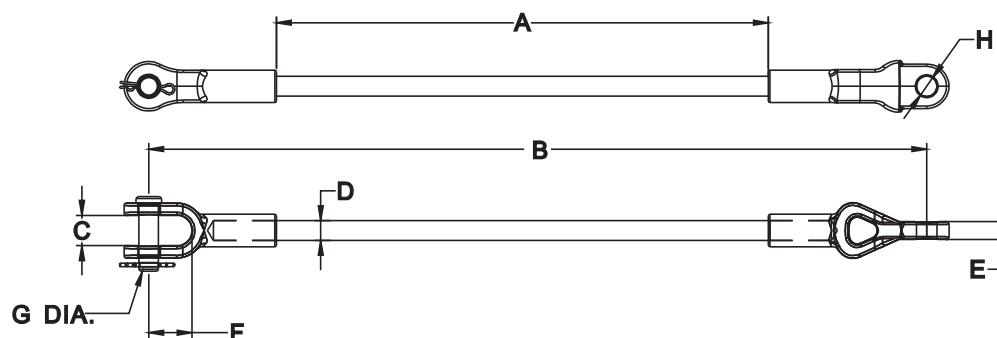

CATALOG NUMBER	DIMENSION(INCHES)								STRENGTH (Lbs.)	FITTINGS
	A	B	C	D	E	F	G	H		
GL30-12C-TE	12	23.7	1.024	0.875	0.886	1.772	0.75	0.811	30,000	Clevis-Thimble Eye
GL30-18C-TE	18	29.7	1.024	0.875	0.886	1.772	0.75	0.811	30,000	Clevis-Thimble Eye
GL30-24C-TE	24	35.7	1.024	0.875	0.886	1.772	0.75	0.811	30,000	Clevis-Thimble Eye
GL30-36C-TE	36	47.7	1.024	0.875	0.886	1.772	0.75	0.811	30,000	Clevis-Thimble Eye
GL30-42C-TE	42	53.7	1.024	0.875	0.886	1.772	0.75	0.811	30,000	Clevis-Thimble Eye
GL30-54C-TE	54	65.7	1.024	0.875	0.886	1.772	0.75	0.811	30,000	Clevis-Thimble Eye
GL30-60C-TE	60	71.7	1.024	0.875	0.886	1.772	0.75	0.811	30,000	Clevis-Thimble Eye
GL30-78C-TE	78	89.7	1.024	0.875	0.886	1.772	0.75	0.811	30,000	Clevis-Thimble Eye
GL30-96C-TE	96	107.7	1.024	0.875	0.886	1.772	0.75	0.811	30,000	Clevis-Thimble Eye
GL30-120C-TE	120	131.7	1.024	0.875	0.886	1.772	0.75	0.811	30,000	Clevis-Thimble Eye
GL30-144C-TE	144	155.7	1.024	0.875	0.886	1.772	0.75	0.811	30,000	Clevis-Thimble Eye

FIBERGLASS GUY STRAIN INSULATORS

**15,000 Pound Rating:
Clevis & Thimble**

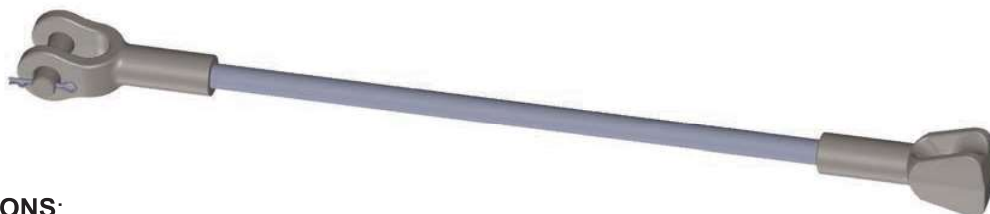


SPECIFICATIONS:

FITTINGS: DUCTILE IRON HOT DIP GALVANIZED ASTM-A-153

FIBERGLASS ROD: PROPRIETARY VEILED GRAY POLYESTER WITH ADDED ULTRAVIOLET PROTECTION

HARDWARE: STEEL HOT DIP GALVANIZED ASTM-A-153


COTTER PIN: STAINLESS STEEL

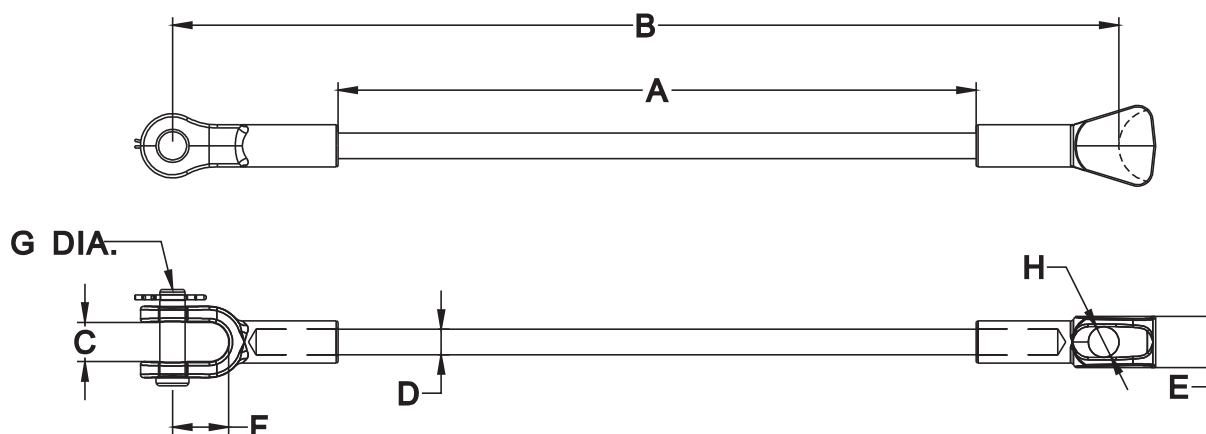

CATALOG NUMBER	DIMENSION(INCHES)								STRENGTH (Lbs.)	FITTINGS
	A	B	C	D	E	F	G	H		
GL15-12C-T	12	20.1	0.965	0.625	1.25	1.378	0.625	0.75	15,000	Clevis-Thimble
GL15-18C-T	18	26.1	0.965	0.625	1.25	1.378	0.625	0.75	15,000	Clevis-Thimble
GL15-24C-T	24	32.1	0.965	0.625	1.25	1.378	0.625	0.75	15,000	Clevis-Thimble
GL15-36C-T	36	44.1	0.965	0.625	1.25	1.378	0.625	0.75	15,000	Clevis-Thimble
GL15-42C-T	42	50.1	0.965	0.625	1.25	1.378	0.625	0.75	15,000	Clevis-Thimble
GL15-54C-T	54	62.1	0.965	0.625	1.25	1.378	0.625	0.75	15,000	Clevis-Thimble
GL15-60C-T	60	68.1	0.965	0.625	1.25	1.378	0.625	0.75	15,000	Clevis-Thimble
GL15-78C-T	78	86.1	0.965	0.625	1.25	1.378	0.625	0.75	15,000	Clevis-Thimble
GL15-96C-T	96	104.1	0.965	0.625	1.25	1.378	0.625	0.75	15,000	Clevis-Thimble
GL15-120C-T	120	128.1	0.965	0.625	1.25	1.378	0.625	0.75	15,000	Clevis-Thimble
GL15-144C-T	144	152.1	0.965	0.625	1.25	1.378	0.625	0.75	15,000	Clevis-Thimble

FIBERGLASS GUY STRAIN INSULATORS

**21,000 Pound Rating:
Clevis & Thimble**

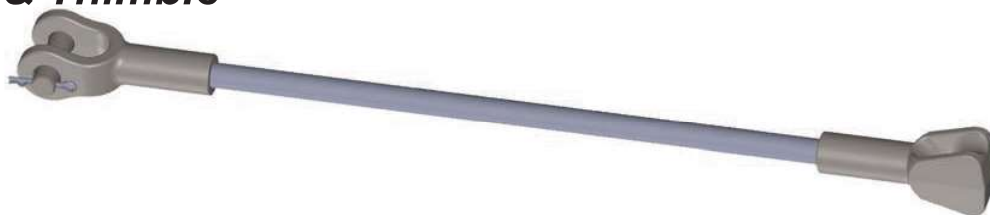


SPECIFICATIONS:

FITTINGS: DUCTILE IRON HOT DIP GALVANIZED ASTM-A-153

FIBERGLASS ROD: PROPRIETARY VEILED GRAY POLYESTER WITH ADDED
ULTRAVIOLET PROTECTION

HARDWARE: STEEL HOT DIP GALVANIZED ASTM-A-153

COTTER PIN: STAINLESS STEEL

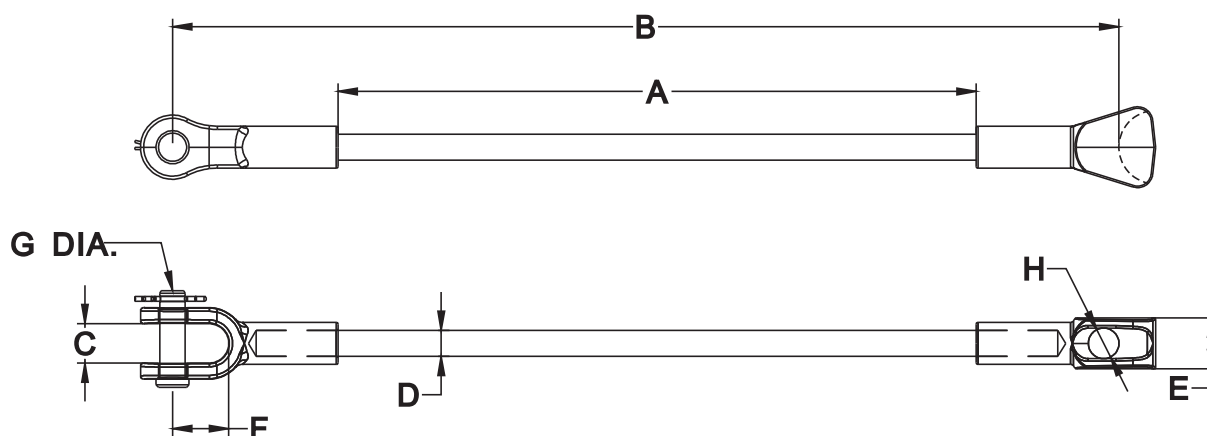

CATALOG NUMBER	DIMENSION(INCHES)								STRENGTH (Lbs.)	FITTINGS
	A	B	C	D	E	F	G	H		
GL21-12C-T	12	20.3	1.024	0.75	1.443	1.693	0.75	0.89	21,000	Clevis-Thimble
GL21-18C-T	18	26.3	1.024	0.75	1.443	1.693	0.75	0.89	21,000	Clevis-Thimble
GL21-24C-T	24	32.3	1.024	0.75	1.443	1.693	0.75	0.89	21,000	Clevis-Thimble
GL21-36C-T	36	44.3	1.024	0.75	1.443	1.693	0.75	0.89	21,000	Clevis-Thimble
GL21-42C-T	42	50.3	1.024	0.75	1.443	1.693	0.75	0.89	21,000	Clevis-Thimble
GL21-54C-T	54	62.3	1.024	0.75	1.443	1.693	0.75	0.89	21,000	Clevis-Thimble
GL21-60C-T	60	68.3	1.024	0.75	1.443	1.693	0.75	0.89	21,000	Clevis-Thimble
GL21-78C-T	78	86.3	1.024	0.75	1.443	1.693	0.75	0.89	21,000	Clevis-Thimble
GL21-96C-T	96	104.3	1.024	0.75	1.443	1.693	0.75	0.89	21,000	Clevis-Thimble
GL21-120C-T	120	128.3	1.024	0.75	1.443	1.693	0.75	0.89	21,000	Clevis-Thimble
GL21-144C-T	144	152.3	1.024	0.75	1.443	1.693	0.75	0.89	21,000	Clevis-Thimble

FIBERGLASS GUY STRAIN INSULATORS

**30,000 Pound Rating:
Clevis & Thimble**




SPECIFICATIONS:

FITTINGS: DUCTILE IRON HOT DIP GALVANIZED ASTM-A-153

FIBERGLASS ROD: PROPRIETARY VEILED GRAY POLYESTER WITH ADDED ULTRAVIOLET PROTECTION

HARDWARE: STEEL HOT DIP GALVANIZED ASTM-A-153

COTTER PIN: STAINLESS STEEL

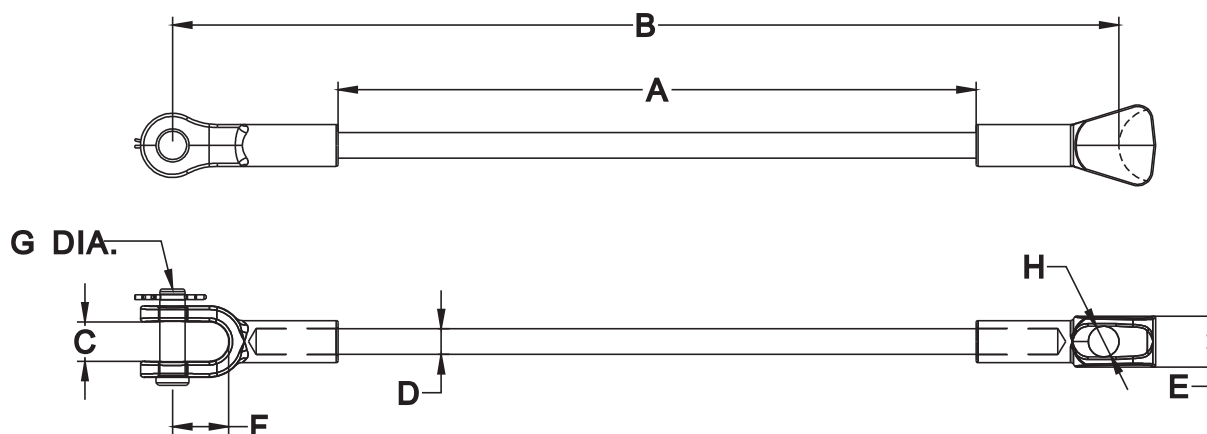

CATALOG NUMBER	DIMENSION(INCHES)								STRENGTH (Lbs.)	FITTINGS
	A	B	C	D	E	F	G	H		
GL30-12C-T	12	21.7	1.024	0.875	1.5	1.772	0.75	0.89	30,000	Clevis-Thimble
GL30-18C-T	18	27.7	1.024	0.875	1.5	1.772	0.75	0.89	30,000	Clevis-Thimble
GL30-24C-T	24	33.7	1.024	0.875	1.5	1.772	0.75	0.89	30,000	Clevis-Thimble
GL30-36C-T	36	45.7	1.024	0.875	1.5	1.772	0.75	0.89	30,000	Clevis-Thimble
GL30-42C-T	42	51.7	1.024	0.875	1.5	1.772	0.75	0.89	30,000	Clevis-Thimble
GL30-54C-T	54	63.7	1.024	0.875	1.5	1.772	0.75	0.89	30,000	Clevis-Thimble
GL30-60C-T	60	69.7	1.024	0.875	1.5	1.772	0.75	0.89	30,000	Clevis-Thimble
GL30-78C-T	78	87.7	1.024	0.875	1.5	1.772	0.75	0.89	30,000	Clevis-Thimble
GL30-96C-T	96	105.7	1.024	0.875	1.5	1.772	0.75	0.89	30,000	Clevis-Thimble
GL30-120C-T	120	129.7	1.024	0.875	1.5	1.772	0.75	0.89	30,000	Clevis-Thimble
GL30-144C-T	144	153.7	1.024	0.875	1.5	1.772	0.75	0.89	30,000	Clevis-Thimble

FIBERGLASS GUY STRAIN INSULATORS

**15,000 Pound Rating:
Clevis & Clevis Roller**




SPECIFICATIONS:

FITTINGS: DUCTILE IRON HOT DIP GALVANIZED ASTM-A-153

FIBERGLASS ROD: PROPRIETARY VEILED GRAY POLYESTER WITH ADDED ULTRAVIOLET PROTECTION

HARDWARE: STEEL HOT DIP GALVANIZED ASTM-A-153

COTTER PIN: STAINLESS STEEL

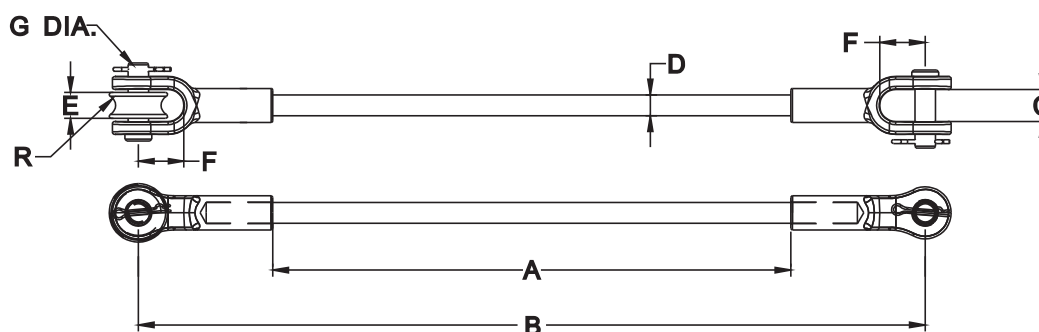

CATALOG NUMBER	DIMENSION(INCHES)								STRENGTH (Lbs.)	FITTINGS
	A	B	C	D	E	F	G	R		
GL15-12C-CR	12	20.1	0.965	0.625	0.781	1.378	0.625	0.312	15,000	Clevis-Clevis Roller
GL15-18C-CR	18	26.1	0.965	0.625	0.781	1.378	0.625	0.312	15,000	Clevis-Clevis Roller
GL15-24C-CR	24	32.1	0.965	0.625	0.781	1.378	0.625	0.312	15,000	Clevis-Clevis Roller
GL15-36C-CR	36	44.1	0.965	0.625	0.781	1.378	0.625	0.312	15,000	Clevis-Clevis Roller
GL15-42C-CR	42	50.1	0.965	0.625	0.781	1.378	0.625	0.312	15,000	Clevis-Clevis Roller
GL15-54C-CR	54	62.1	0.965	0.625	0.781	1.378	0.625	0.312	15,000	Clevis-Clevis Roller
GL15-60C-CR	60	68.1	0.965	0.625	0.781	1.378	0.625	0.312	15,000	Clevis-Clevis Roller
GL15-78C-CR	78	86.1	0.965	0.625	0.781	1.378	0.625	0.312	15,000	Clevis-Clevis Roller
GL15-96C-CR	96	104.1	0.965	0.625	0.781	1.378	0.625	0.312	15,000	Clevis-Clevis Roller
GL15-120C-CR	120	128.1	0.965	0.625	0.781	1.378	0.625	0.312	15,000	Clevis-Clevis Roller
GL15-144C-CR	144	152.1	0.965	0.625	0.781	1.378	0.625	0.312	15,000	Clevis-Clevis Roller

FIBERGLASS GUY STRAIN INSULATORS

**21,000 Pound Rating:
Clevis & Clevis Roller**




SPECIFICATIONS:

FITTINGS: DUCTILE IRON HOT DIP GALVANIZED ASTM-A-153

FIBERGLASS ROD: PROPRIETARY VEILED GRAY POLYESTER WITH ADDED ULTRAVIOLET PROTECTION

HARDWARE: STEEL HOT DIP GALVANIZED ASTM-A-153

COTTER PIN: STAINLESS STEEL

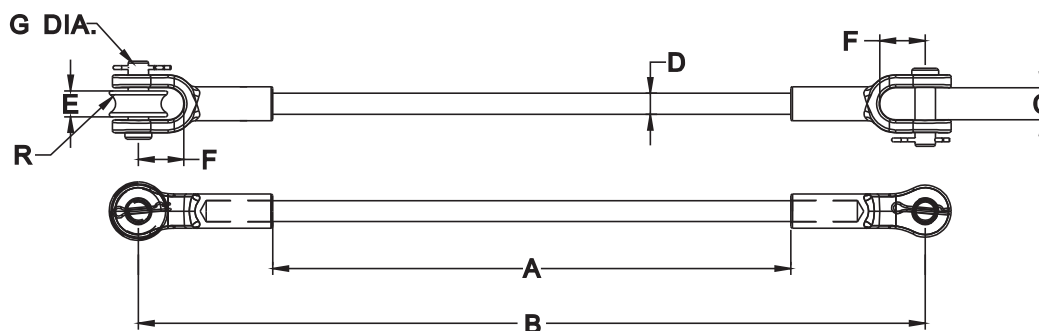

CATALOG NUMBER	DIMENSION(INCHES)								STRENGTH (Lbs.)	FITTINGS
	A	B	C	D	E	F	G	R		
GL21-12C-CR	12	21	1.024	0.75	0.875	1.693	0.75	0.375	21,000	Clevis-Clevis Roller
GL21-18C-CR	18	27	1.024	0.75	0.875	1.693	0.75	0.375	21,000	Clevis-Clevis Roller
GL21-24C-CR	24	33	1.024	0.75	0.875	1.693	0.75	0.375	21,000	Clevis-Clevis Roller
GL21-36C-CR	36	45	1.024	0.75	0.875	1.693	0.75	0.375	21,000	Clevis-Clevis Roller
GL21-42C-CR	42	51	1.024	0.75	0.875	1.693	0.75	0.375	21,000	Clevis-Clevis Roller
GL21-54C-CR	54	63	1.024	0.75	0.875	1.693	0.75	0.375	21,000	Clevis-Clevis Roller
GL21-60C-CR	60	69	1.024	0.75	0.875	1.693	0.75	0.375	21,000	Clevis-Clevis Roller
GL21-78C-CR	78	87	1.024	0.75	0.875	1.693	0.75	0.375	21,000	Clevis-Clevis Roller
GL21-96C-CR	96	105	1.024	0.75	0.875	1.693	0.75	0.375	21,000	Clevis-Clevis Roller
GL21-120C-CR	120	129	1.024	0.75	0.875	1.693	0.75	0.375	21,000	Clevis-Clevis Roller
GL21-144C-CR	144	153	1.024	0.75	0.875	1.693	0.75	0.375	21,000	Clevis-Clevis Roller

FIBERGLASS GUY STRAIN INSULATORS

**30,000 Pound Rating:
Clevis & Clevis Roller**




SPECIFICATIONS:

FITTINGS: DUCTILE IRON HOT DIP GALVANIZED ASTM-A-153

FIBERGLASS ROD: PROPRIETARY VEILED GRAY POLYESTER WITH ADDED ULTRAVIOLET PROTECTION

HARDWARE: STEEL HOT DIP GALVANIZED ASTM-A-153

COTTER PIN: STAINLESS STEEL

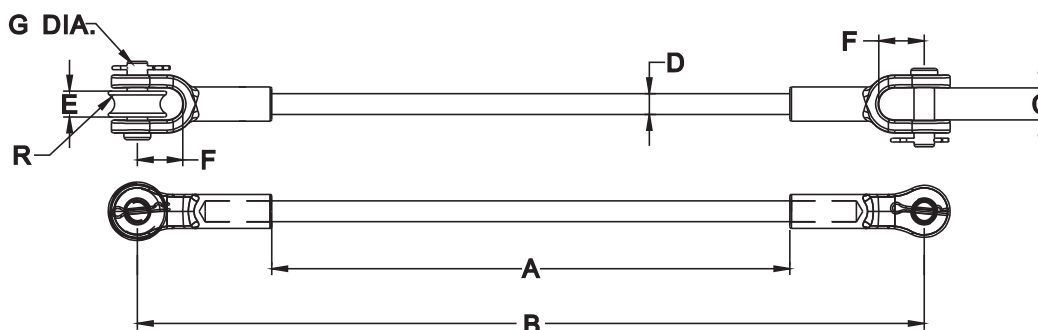

CATALOG NUMBER	DIMENSION(INCHES)								STRENGTH (Lbs.)	FITTINGS
	A	B	C	D	E	F	G	R		
GL30-12C-CR	12	22.4	1.024	0.875	0.875	1.772	0.75	0.375	30,000	Clevis-Clevis Roller
GL30-18C-CR	18	28.4	1.024	0.875	0.875	1.772	0.75	0.375	30,000	Clevis-Clevis Roller
GL30-24C-CR	24	34.4	1.024	0.875	0.875	1.772	0.75	0.375	30,000	Clevis-Clevis Roller
GL30-36C-CR	36	46.4	1.024	0.875	0.875	1.772	0.75	0.375	30,000	Clevis-Clevis Roller
GL30-42C-CR	42	52.4	1.024	0.875	0.875	1.772	0.75	0.375	30,000	Clevis-Clevis Roller
GL30-54C-CR	54	64.4	1.024	0.875	0.875	1.772	0.75	0.375	30,000	Clevis-Clevis Roller
GL30-60C-CR	60	70.4	1.024	0.875	0.875	1.772	0.75	0.375	30,000	Clevis-Clevis Roller
GL30-78C-CR	78	88.4	1.024	0.875	0.875	1.772	0.75	0.375	30,000	Clevis-Clevis Roller
GL30-96C-CR	96	106.4	1.024	0.875	0.875	1.772	0.75	0.375	30,000	Clevis-Clevis Roller
GL30-120C-CR	120	130.4	1.024	0.875	0.875	1.772	0.75	0.375	30,000	Clevis-Clevis Roller
GL30-144C-CR	144	154.4	1.024	0.875	0.875	1.772	0.75	0.375	30,000	Clevis-Clevis Roller

FIBERGLASS GUY STRAIN INSULATORS

**15,000 Pound Rating:
Thimble Eye & Thimble Eye**




SPECIFICATIONS:

FITTINGS: DUCTILE IRON HOT DIP GALVANIZED ASTM-A-153

FIBERGLASS ROD: PROPRIETARY VEILED GRAY POLYESTER WITH ADDED ULTRAVIOLET PROTECTION

HARDWARE: STEEL HOT DIP GALVANIZED ASTM-A-153

COTTER PIN: STAINLESS STEEL

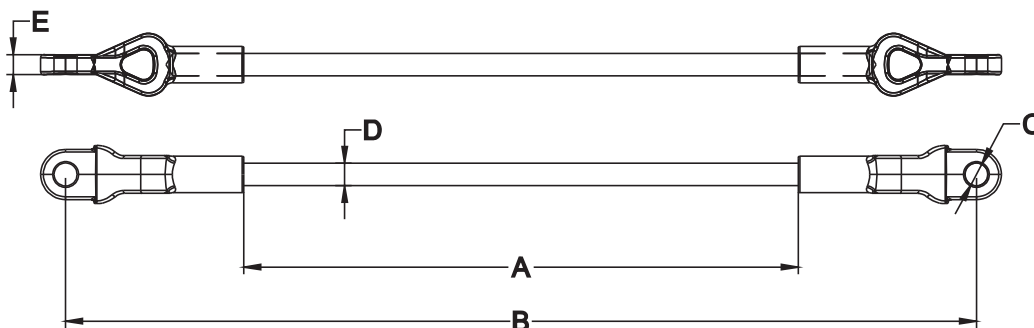

CATALOG NUMBER	DIMENSION(INCHES)					STRENGTH (Lbs.)	FITTINGS
	A	B	C	D	E		
GL15-12TE-TE	12	22.1	0.65	0.625	0.563	15,000	Thimble Eye-Thimble Eye
GL15-18TE-TE	18	28.1	0.65	0.625	0.563	15,000	Thimble Eye-Thimble Eye
GL15-24TE-TE	24	34.1	0.65	0.625	0.563	15,000	Thimble Eye-Thimble Eye
GL15-36TE-TE	36	46.1	0.65	0.625	0.563	15,000	Thimble Eye-Thimble Eye
GL15-42TE-TE	42	52.1	0.65	0.625	0.563	15,000	Thimble Eye-Thimble Eye
GL15-54TE-TE	54	64.1	0.65	0.625	0.563	15,000	Thimble Eye-Thimble Eye
GL15-60TE-TE	60	70.1	0.65	0.625	0.563	15,000	Thimble Eye-Thimble Eye
GL15-78TE-TE	78	88.1	0.65	0.625	0.563	15,000	Thimble Eye-Thimble Eye
GL15-96TE-TE	96	106.1	0.65	0.625	0.563	15,000	Thimble Eye-Thimble Eye
GL15-120TE-TE	120	130.1	0.65	0.625	0.563	15,000	Thimble Eye-Thimble Eye
GL15-144TE-TE	144	154.1	0.65	0.625	0.563	15,000	Thimble Eye-Thimble Eye

FIBERGLASS GUY STRAIN INSULATORS

**21,000 Pound Rating:
Thimble Eye & Thimble Eye**




SPECIFICATIONS:

FITTINGS: DUCTILE IRON HOT DIP GALVANIZED ASTM-A-153

FIBERGLASS ROD: PROPRIETARY VEILED GRAY POLYESTER WITH ADDED ULTRAVIOLET PROTECTION

HARDWARE: STEEL HOT DIP GALVANIZED ASTM-A-153

COTTER PIN: STAINLESS STEEL

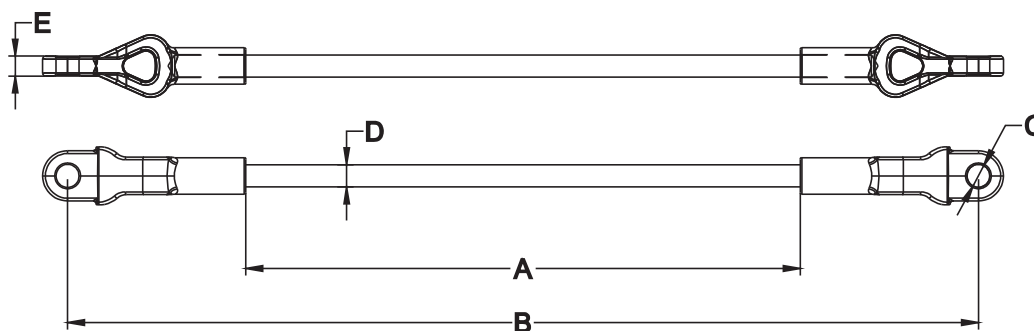

CATALOG NUMBER	DIMENSION(INCHES)					STRENGTH (Lbs.)	FITTINGS
	A	B	C	D	E		
GL21-12TE-TE	12	23.4	0.811	0.75	0.63	21,000	Thimble Eye-Thimble Eye
GL21-18TE-TE	18	29.4	0.811	0.75	0.63	21,000	Thimble Eye-Thimble Eye
GL21-24TE-TE	24	35.4	0.811	0.75	0.63	21,000	Thimble Eye-Thimble Eye
GL21-36TE-TE	36	47.4	0.811	0.75	0.63	21,000	Thimble Eye-Thimble Eye
GL21-42TE-TE	42	53.4	0.811	0.75	0.63	21,000	Thimble Eye-Thimble Eye
GL21-54TE-TE	54	65.4	0.811	0.75	0.63	21,000	Thimble Eye-Thimble Eye
GL21-60TE-TE	60	71.4	0.811	0.75	0.63	21,000	Thimble Eye-Thimble Eye
GL21-78TE-TE	78	89.4	0.811	0.75	0.63	21,000	Thimble Eye-Thimble Eye
GL21-96TE-TE	96	107.4	0.811	0.75	0.63	21,000	Thimble Eye-Thimble Eye
GL21-120TE-TE	120	131.4	0.811	0.75	0.63	21,000	Thimble Eye-Thimble Eye
GL21-144TE-TE	144	155.4	0.811	0.75	0.63	21,000	Thimble Eye-Thimble Eye

FIBERGLASS GUY STRAIN INSULATORS

**30,000 Pound Rating:
Thimble Eye & Thimble Eye**




SPECIFICATIONS:

FITTINGS: DUCTILE IRON HOT DIP GALVANIZED ASTM-A-153

FIBERGLASS ROD: PROPRIETARY VEILED GRAY POLYESTER WITH ADDED ULTRAVIOLET PROTECTION

HARDWARE: STEEL HOT DIP GALVANIZED ASTM-A-153

COTTER PIN: STAINLESS STEEL

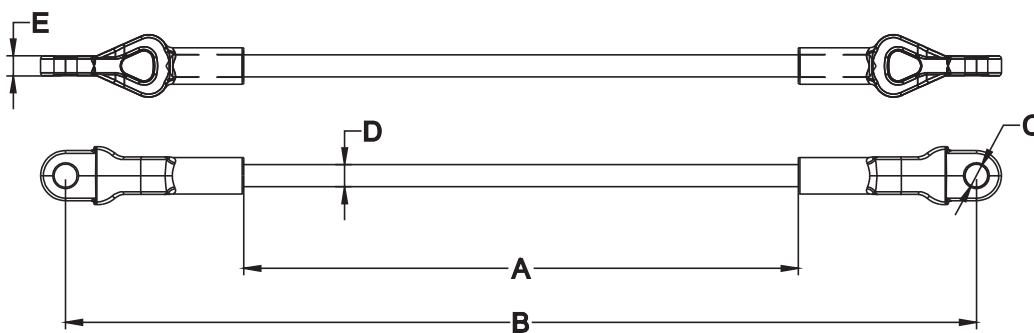

CATALOG NUMBER	DIMENSION(INCHES)					STRENGTH (Lbs.)	FITTINGS
	A	B	C	D	E		
GL30-12TE-TE	12	25	0.811	0.875	0.886	30,000	Thimble Eye-Thimble Eye
GL30-18TE-TE	18	31	0.811	0.875	0.886	30,000	Thimble Eye-Thimble Eye
GL30-24TE-TE	24	37	0.811	0.875	0.886	30,000	Thimble Eye-Thimble Eye
GL30-36TE-TE	36	49	0.811	0.875	0.886	30,000	Thimble Eye-Thimble Eye
GL30-42TE-TE	42	55	0.811	0.875	0.886	30,000	Thimble Eye-Thimble Eye
GL30-54TE-TE	54	67	0.811	0.875	0.886	30,000	Thimble Eye-Thimble Eye
GL30-60TE-TE	60	73	0.811	0.875	0.886	30,000	Thimble Eye-Thimble Eye
GL30-78TE-TE	78	91	0.811	0.875	0.886	30,000	Thimble Eye-Thimble Eye
GL30-96TE-TE	96	109	0.811	0.875	0.886	30,000	Thimble Eye-Thimble Eye
GL30-120TE-TE	120	133	0.811	0.875	0.886	30,000	Thimble Eye-Thimble Eye
GL30-144TE-TE	144	157	0.811	0.875	0.886	30,000	Thimble Eye-Thimble Eye

FIBERGLASS GUY STRAIN INSULATORS

**15,000 Pound Rating:
Thimble & Thimble**




SPECIFICATIONS:

FITTINGS: DUCTILE IRON HOT DIP GALVANIZED ASTM-A-153

FIBERGLASS ROD: PROPRIETARY VEILED GRAY POLYESTER WITH ADDED ULTRAVIOLET PROTECTION

HARDWARE: STEEL HOT DIP GALVANIZED ASTM-A-153

COTTER PIN: STAINLESS STEEL

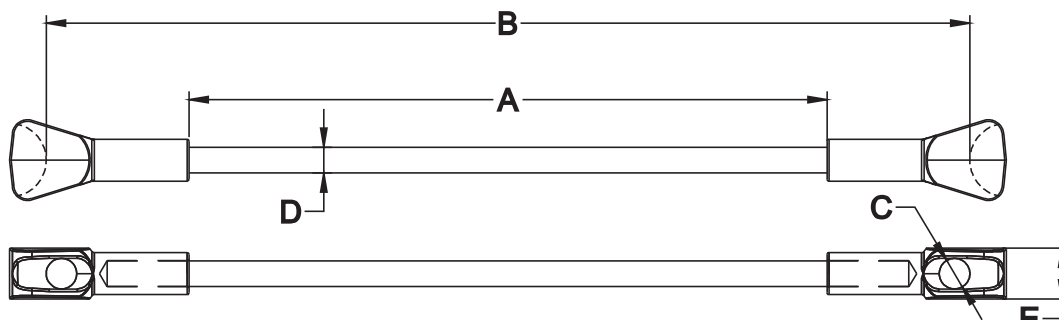

CATALOG NUMBER	DIMENSION(INCHES)					STRENGTH (Lbs.)	FITTINGS
	A	B	C	D	E		
GL15-12T-T	12	18.9	0.75	0.625	1.25	15,000	Thimble-Thimble
GL15-18T-T	18	24.9	0.75	0.625	1.25	15,000	Thimble-Thimble
GL15-24T-T	24	30.9	0.75	0.625	1.25	15,000	Thimble-Thimble
GL15-36T-T	36	42.9	0.75	0.625	1.25	15,000	Thimble-Thimble
GL15-42T-T	42	48.9	0.75	0.625	1.25	15,000	Thimble-Thimble
GL15-54T-T	54	60.9	0.75	0.625	1.25	15,000	Thimble-Thimble
GL15-60T-T	60	66.9	0.75	0.625	1.25	15,000	Thimble-Thimble
GL15-78T-T	78	84.9	0.75	0.625	1.25	15,000	Thimble-Thimble
GL15-96T-T	96	102.9	0.75	0.625	1.25	15,000	Thimble-Thimble
GL15-120T-T	120	126.9	0.75	0.625	1.25	15,000	Thimble-Thimble
GL15-144T-T	144	150.9	0.75	0.625	1.25	15,000	Thimble-Thimble

FIBERGLASS GUY STRAIN INSULATORS

**21,000 Pound Rating:
Thimble & Thimble**




SPECIFICATIONS:

FITTINGS: DUCTILE IRON HOT DIP GALVANIZED ASTM-A-153

FIBERGLASS ROD: PROPRIETARY VEILED GRAY POLYESTER WITH ADDED ULTRAVIOLET PROTECTION

HARDWARE: STEEL HOT DIP GALVANIZED ASTM-A-153

COTTER PIN: STAINLESS STEEL

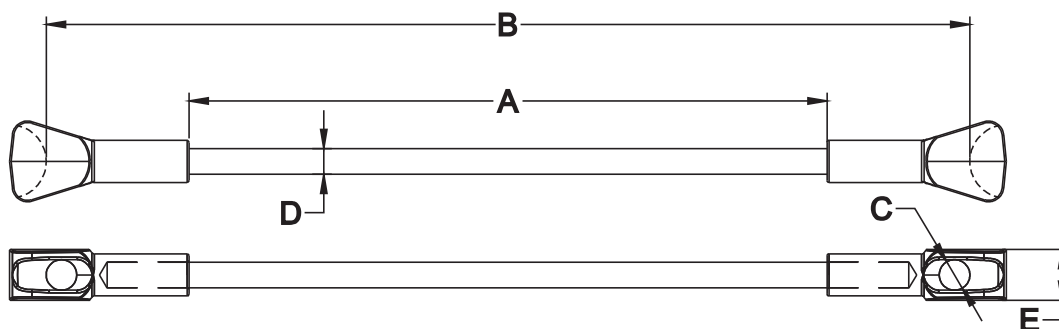

CATALOG NUMBER	DIMENSION(INCHES)					STRENGTH (Lbs.)	FITTINGS
	A	B	C	D	E		
GL21-12T-T	12	19.6	0.89	0.75	1.443	21,000	Thimble-Thimble
GL21-18T-T	18	25.6	0.89	0.75	1.443	21,000	Thimble-Thimble
GL21-24T-T	24	31.6	0.89	0.75	1.443	21,000	Thimble-Thimble
GL21-36T-T	36	43.6	0.89	0.75	1.443	21,000	Thimble-Thimble
GL21-42T-T	42	49.6	0.89	0.75	1.443	21,000	Thimble-Thimble
GL21-54T-T	54	61.6	0.89	0.75	1.443	21,000	Thimble-Thimble
GL21-60T-T	60	67.6	0.89	0.75	1.443	21,000	Thimble-Thimble
GL21-78T-T	78	85.6	0.89	0.75	1.443	21,000	Thimble-Thimble
GL21-96T-T	96	103.6	0.89	0.75	1.443	21,000	Thimble-Thimble
GL21-120T-T	120	127.6	0.89	0.75	1.443	21,000	Thimble-Thimble
GL21-144T-T	144	151.6	0.89	0.75	1.443	21,000	Thimble-Thimble

FIBERGLASS GUY STRAIN INSULATORS

**30,000 Pound Rating:
Thimble & Thimble**




SPECIFICATIONS:

FITTINGS: DUCTILE IRON HOT DIP GALVANIZED ASTM-A-153

FIBERGLASS ROD: PROPRIETARY VEILED GRAY POLYESTER WITH ADDED ULTRAVIOLET PROTECTION

HARDWARE: STEEL HOT DIP GALVANIZED ASTM-A-153

COTTER PIN: STAINLESS STEEL

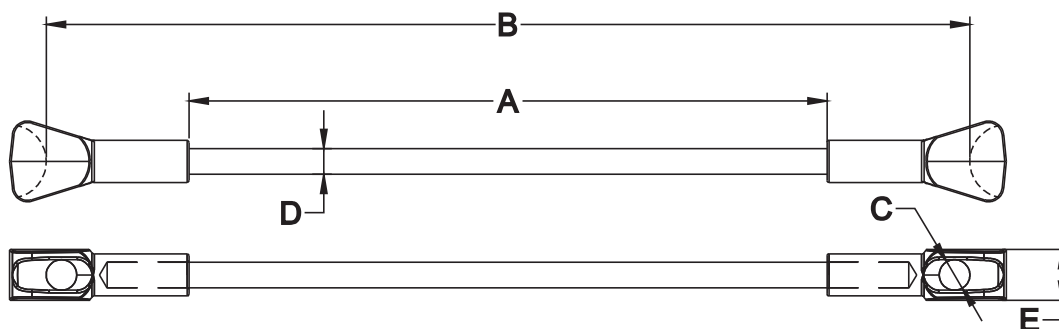

CATALOG NUMBER	DIMENSION(INCHES)					STRENGTH (Lbs.)	FITTINGS
	A	B	C	D	E		
GL30-12T-T	12	21	0.89	0.875	1.5	30,000	Thimble-Thimble
GL30-18T-T	18	27	0.89	0.875	1.5	30,000	Thimble-Thimble
GL30-24T-T	24	33	0.89	0.875	1.5	30,000	Thimble-Thimble
GL30-36T-T	36	45	0.89	0.875	1.5	30,000	Thimble-Thimble
GL30-42T-T	42	51	0.89	0.875	1.5	30,000	Thimble-Thimble
GL30-54T-T	54	63	0.89	0.875	1.5	30,000	Thimble-Thimble
GL30-60T-T	60	69	0.89	0.875	1.5	30,000	Thimble-Thimble
GL30-78T-T	78	87	0.89	0.875	1.5	30,000	Thimble-Thimble
GL30-96T-T	96	105	0.89	0.875	1.5	30,000	Thimble-Thimble
GL30-120T-T	120	129	0.89	0.875	1.5	30,000	Thimble-Thimble
GL30-144T-T	144	153	0.89	0.875	1.5	30,000	Thimble-Thimble